

ISI-MOD17MDALI12V

DANLERS

Passive Infra Red (PIR) Occupancy Detector & Photocell Module

Input: 12VDC



PLEASE READ THESE INSTRUCTIONS BEFORE INSTALLING THE PRODUCT

NOTE: This product is only compatible to work with ISIX enable equipment

This ISI-MOD17MDALI12V module is designed for building into luminaires or it can be mounted onto a Eurodata plate. Configurable via the free to download APP on Google Play or Apple APP Store.

INSTALLATION

To be installed by a competent person with reference to BS 7671 or equivalent local standards. If in doubt consult a qualified electrician.

- A mounting bezel is supplied to assist manufacturers to mount the ISI-MOD17MDALI12V control unit into a luminaire housing.
- The ISI-MOD17MDALI12V control unit snap fits into the mounting bezel.
- The Power Supply (ISI-PSU12VDC) for the ISI-MOD17MDALI12V device must be connected as shown in diagram 2:
+12 - 12V in. 0V - 0V in on ISI-PSU12VDC DA-/DA+ Dali control lines.
- ISI-MOD17MDALI12V must be connected to the Power Supply (ISI-PSU12VDC) via the DANLERS communication cable provided.
NOTE: The use of non DANLERS connectors may damage the ISI-MOD17MDALI12V or ISI-PSU12VDC and will invalidate the warranty.

OPERATION

To check the operation of the ISI-MOD17MDALI12V:

- Turn on the supply then after 20 seconds if the sensor has recognised movement of a person within its zone of detection the integral red LED on ISI-MOD17MDALI12V will stay illuminated for 4 seconds before the red LED turns off.

The control also features adjustable time out (time lag) control and daylight threshold control which are configured by the ISISI APP.

PRECAUTIONS





- Do not place the ISI-MOD17MDALI12V near heat sources, fans or in ventilated ceiling voids.
- Do not place close to, or positioned such that, any light source points directly into the ISI-MOD17MDALI12V.
- Ensure wires and cables are securely held within the connection terminals.
- Disconnect the ISI-PSU12VDC from the circuit before performing insulation testing of the wiring circuit.**

5 YEAR WARRANTY

ISI-MOD17MDALI12V comes with a 5 year warranty from the date of manufacture and is CE marked.

TECHNICAL DETAILS

INPUT	
Voltage:	12V DC
Frequency:	NA
Max. mains current:	52mA
Standby current:	52mA
RADIO TRANSCIVER	
Operating frequencies:	2.4... 2,483 GHz
Max. output power:	+4 dBm
LUX PARAMETERS	
Range:	5 - 2000 lux
OPERATING CONDITIONS	
Note: The temperature difference between the detection target and the background must be at least 4 °C.	
Ambient temperature:	-4... +104 °F
Storage temperature:	-13... +167 °F
Max. relative humidity:	0... 80%, non cond.
POWER SUPPLY CONNECTORS	
Terminal block Wire size:	14-22 AWG solid or stranded
Wire strip length:	0.23-0.28"
Tightening torque:	3.5lb in.
MECHANICAL DATA	
Dimensions:	Control: 25 x 50 x 38mm Bezel: 30 x 56 x 11mm Power Supply: 50 x 120 x 132mm Telejack: 600mm
Weight:	140g (unpacked)
Degree of protection:	IP20
Protection class:	Built-in Class 2
Material (casing)	Flame-retardant polycarbonate
Finish / Colour	Matt /White (RAL 9003)
Protection class:	Built-in Class 2
CONFORMITY AND STANDARDS	
EMC emission: EN 301 489-1 V2.2.0, EN 301 489-17 V3.1.1, EN 55032: 2015, EN61000-3-2: 2014, EN61000-3-3: 2013	
EMC immunity: EN 301 489-1 V2.2.0, EN 301 489-17 V3.1.1	
Environment: Complies with WEEE and RoHS directives	

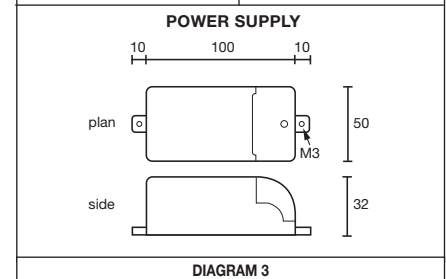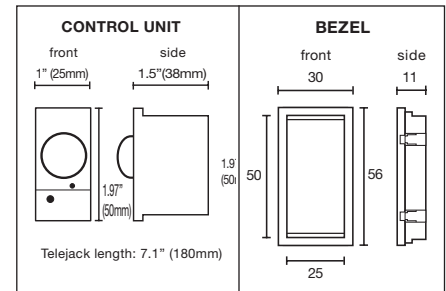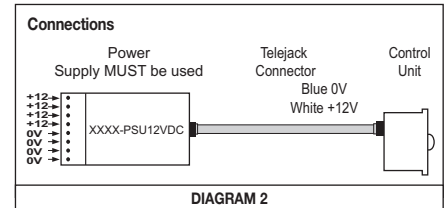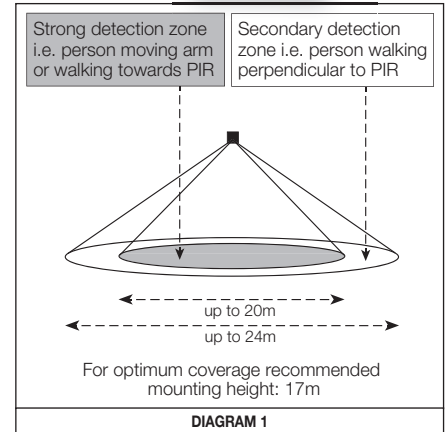

DANLERS Limited, Vincients Road, CHIPPENHAM, Wiltshire, SN14 6NQ, UK. Telephone: +44 (0)1249 443377 Fax: +44 (0)1249 443388 E-mail: sales@danlers.co.uk www.danlers.co.uk

info@danlersamerica.com USA HQ Address: 4815 Cedar Hills Dr. Slinger WI 53086 Phone: (800) 206-0038 www.danlersamerica.com

Company Registered Number 2570169 VAT Registration Number 543 5491 38